


## PLAN VIEW NOT TO SCALE

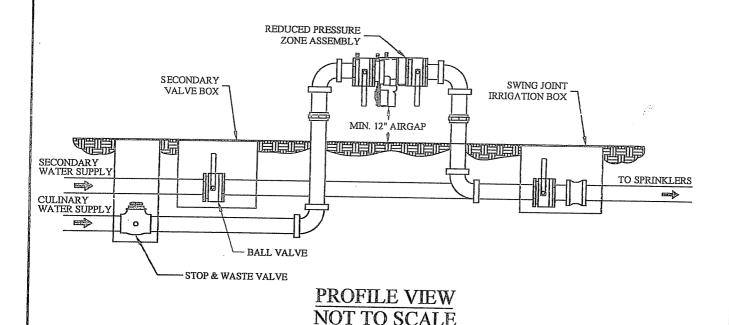

## NOTES:

- 1. THE SWING CONNECTION IS INSTALLED SO THAT EITHER THE SECONDARY IRRIGATION WATER OR THE CULINARY WATER IS CONNECTED AND FEEDING THE SPRINKLER SYSTEM AT THE ONE TIME.
- 2. THE REDUCED PRESSURE ZONE ASSEMBLY MUST BE LOCATED AT A MINIMUM OF 12" FROM WALL, FENCE OR OTHER OBSTACLE.
- 3. THE REDUCED PRESSURE ZONE ASSEMBLY MUST BE LOCATED AT A MINIMUM OF 12" ABOVE GRADE (NOT ALLOWED IN A PIT BELOW GRADE).

  4. THE REDUCED PRESSURE ZONE ASSEMBLY MUST BE INSPECTED BY A CERTIFIED
- BACKFLOW TECHNICIAN ON AN ANNUAL BASIS.



-					11 7 11 11
į				SOUTH JORDAN CITY	
DATE	REVISIONS	ВУ	DRAWN: KS DATE: 2/06	SECONDARY & CULINARY WATER IRRIGATION CONNECTION	standard drawing 2001